




# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO


DIN 8187 - ISO / R 606




typ 1




typ 2




typ 3




typ 4




typ 5



typ 6



typ 7



typ 8

Materiał: stal C 43

3/8" x 7/32"

podziałka  
9,525 mm



B1	B2	B3	b1	C	r3
5,3	15,4	25,6	5,2	1	10

Z	de	dp	1-rzędowe 06B-1						2-rzędowe 06B-2						3-rzędowe 06B-3					
			kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]
17	55,50	51,83	P1316	45	22	1008	1	0,11	P1333	41	22	1008	2	0,11	P1343	-	25,60	1008	5	0,15
18	58,60	54,85	P1317	45	22	1008	1	0,14	-	-	-	-	-	-	-	-	-	-	-	-
19	61,60	57,86	P1318	45	22	1008	1	0,15	P1334	46	22	1008	2	0,18	P1344	-	25,60	1008	5	0,24
20	64,60	60,89	P1319	46	22	1008	1	0,16	-	-	-	-	-	-	-	-	-	-	-	-
21	67,60	63,90	P1320	46	22	1008	1	0,18	P1335	49	22	1008	2	0,16	P1345	-	25,60	1008	5	0,34
22	70,60	66,93	P1321	55	22	1108	1	0,25	-	-	-	-	-	-	-	-	-	-	-	-
23	73,70	69,95	P1322	63	25	1210	1	0,27	P1336	59	25	1210	2	0,27	P1346	-	25,60	1210	5	0,30
24	76,70	72,97	P1323	63	25	1210	1	0,30	-	-	-	-	-	-	-	-	-	-	-	-
25	79,70	75,99	P1324	63	25	1210	1	0,32	P1337	64	25	1210	2	0,37	P1347	-	25,60	1210	5	0,41
26	82,70	79,02	P1325	63	25	1210	1	0,33	-	-	-	-	-	-	-	-	-	-	-	-
27	85,70	82,04	P1326	63	25	1210	1	0,34	P1338	70	25	1210	2	0,50	P1348	-	25,60	1210	5	0,55
28	88,80	85,07	P1327	63	25	1210	1	0,37	-	-	-	-	-	-	-	-	-	-	-	-
30	94,80	91,12	P1328	63	25	1210	1	0,39	P1339	75	25	1210	2	0,68	P1349	79	38,00	1615	4	0,88
38	119,00	115,34	P1329	70	25	1210	1	0,65	P1340	80	25	1610	2	1,03	P1350	90	38,00	1615	4	1,75
45	141,10	136,54	P1330	70	25	1210	1	1,01	-	-	-	-	-	-	-	-	-	-	-	-
*57	177,50	172,91	P1331	83	25	1210	6	1,34	P1341	92	25	1610	7	1,16	-	-	-	-	-	-
*76	235,10	230,49	P1332	83	25	1210	6	1,84	P1342	92	25	1610	7	2,19	-	-	-	-	-	-


\* wykonane z żeliwa: G 22

# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO


DIN 8187 - ISO / R 606




typ 1




typ 2




typ 3




typ 4




typ 5



typ 6



typ 7



typ 8

Materiał: stal C 43

1/2" x 5/16"

podziałka  
12,7 mm



B1	B2	B3	b1	C	r3
7,2	21	34,9	7	1,3	13

Z	de	dp	1-rzędowe 08B-1					2-rzędowe 08B-2					3-rzędowe 08B-3							
			kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]
15	66,50	61,80	P1351	45	22	1008	1	0,16	P1370	46	22	1008	2	0,22	P1381	-	34,90	1008	5	0,36
16	69,90	65,10	P1352	50	22	1108	1	0,20	-	-	-	-	-	-	-	-	-	-	-	-
17	74,50	69,11	P1353	60	25	1210	1	0,22	P1371	56	25	1210	2	0,23	P1382	-	34,90	1210	5	0,35
18	78,00	73,14	P1354	60	25	1210	1	0,27	-	-	-	-	-	-	-	-	-	-	-	-
19	82,50	77,15	P1355	63	25	1210	1	0,33	P1372	62	25	1210	2	0,38	P1383	62	38,00	1215	4	0,61
20	86,00	81,19	P1356	67	25	1610	1	0,27	-	-	-	-	-	-	-	-	-	-	-	-
21	90,60	85,21	P1357	71	25	1610	1	0,36	P1373	70	25	1610	2	0,50	P1384	70	38,00	1615	4	0,65
22	94,10	89,24	P1358	71	25	1610	1	0,36	-	-	-	-	-	-	-	-	-	-	-	-
23	98,70	93,26	P1359	76	25	1610	1	0,50	P1374	79	25	1610	2	0,62	P1385	70	38,00	1615	4	0,93
24	102,10	97,29	P1360	76	25	1610	1	0,53	-	-	-	-	-	-	-	-	-	-	-	-
25	106,70	101,32	P1361	76	25	1610	1	0,56	P1375	87	32	2012	2	0,72	P1386	-	34,90	2012	5	0,85
26	110,20	105,36	P1362	76	25	1610	1	0,60	-	-	-	-	-	-	-	-	-	-	-	-
27	114,80	109,39	P1363	76	25	1610	1	0,63	P1376	87	32	2012	2	0,92	P1387	-	34,90	2012	5	1,18
28	118,30	113,42	P1364	90	32	2012	1	0,77	-	-	-	-	-	-	-	-	-	-	-	-
30	126,90	121,49	P1365	90	32	2012	1	0,91	P1377	87	32	2012	2	1,24	P1388	-	34,90	2012	5	1,73
38	159,20	153,79	P1366	90	32	2012	1	1,25	P1378	100	32	2012	2	2,50	P1389	-	34,90	2012	5	3,53
45	188,60	182,07	P1367	111	32	2012	1	1,68	-	-	-	-	-	-	-	-	-	-	-	-
*57	237,10	230,54	P1368	111	32	2012	6	2,78	P1379	111	32	2012	7	3,64	-	-	-	-	-	-
*76	313,90	307,33	P1369	111	32	2012	6	3,81	P1380	111	32	2012	7	5,09	-	-	-	-	-	-


\* wykonane z żeliwa: G 22

# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO


DIN 8187 - ISO / R 606




typ 1




typ 2




typ 3




typ 4




typ 5



typ 6



typ 7



typ 8

Materiał: stal C 43

5/8" x 3/8"

podziałka  
15,875 mm



B1	B2	B3	b1	C	r3
9,1	25,5	42,1	9	1,6	16

Z	de	dp	1-rzędowe 10B-1						2-rzędowe 10B-2						3-rzędowe 10B-3					
			kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]
13	73,20	66,33	P1390	47	22	1008	1	0,23	-	-	-	-	-	-	-	-	-	-	-	-
14	78,20	71,34	P1391	52	22	1108	1	0,27	-	-	-	-	-	-	-	-	-	-	-	-
15	83,20	76,35	P1392	60	25	1210	1	0,30	P1410	-	25,50	1210	3	0,38	P1418	-	42,10	1215	5	0,63
16	88,30	81,37	P1393	63	25	1210	1	0,38	-	-	-	-	-	-	-	-	-	-	-	-
17	93,30	86,39	P1394	71	25	1610	1	0,38	P1411	-	25,50	1610	3	0,47	P1419	-	42,10	1215	5	1,01
18	98,30	91,42	P1395	71	25	1610	1	0,43	-	-	-	-	-	-	-	-	-	-	-	-
19	103,30	96,44	P1396	75	25	1610	1	0,54	P1412	-	25,50	1610	3	0,72	P1420	-	42,10	1615	5	1,19
20	108,40	101,49	P1397	76	25	1610	1	0,61	-	-	-	-	-	-	-	-	-	-	-	-
21	113,40	106,51	P1398	76	25	1610	1	0,65	P1413	-	25,50	1610	3	1,01	P1421	-	42,10	1615	5	1,66
22	118,40	111,55	P1399	76	25	1610	1	0,72	-	-	-	-	-	-	-	-	-	-	-	-
23	123,50	116,58	P1400	76	25	1610	1	0,77	P1414	-	25,50	1610	3	1,35	P1422	-	42,10	2012	5	1,78
24	128,50	121,62	P1401	90	32	2012	1	0,98	-	-	-	-	-	-	-	-	-	-	-	-
25	133,60	126,66	P1402	90	32	2012	1	1,05	P1415	90	32,00	2012	2	1,55	P1423	105	44,00	2517	4	1,81
26	138,60	131,70	P1403	90	32	2012	1	1,11	-	-	-	-	-	-	-	-	-	-	-	-
27	143,60	136,74	P1404	90	32	2012	1	1,17	P1416	90	32,00	2012	2	1,98	P1424	110	44,00	2517	4	2,45
28	148,70	141,78	P1405	90	32	2012	1	1,29	-	-	-	-	-	-	-	-	-	-	-	-
30	158,80	151,87	P1406	90	32	2012	1	1,40	P1417	90	32,00	2012	2	2,63	P1425	120	44,00	2517	4	3,54
38	199,10	192,23	P1407	100	32	2012	1	2,43	-	-	-	-	-	-	-	-	-	-	-	-
*57	296,60	288,18	P1408	111	32	2012	6	4,28	-	-	-	-	-	-	-	-	-	-	-	-
*76	392,50	384,16	P1409	111	32	2012	6	5,95	-	-	-	-	-	-	-	-	-	-	-	-


\* wykonane z żeliwa: G 22

# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO


DIN 8187 - ISO / R 606




typ 1




typ 2




typ 3




typ 4




typ 5



typ 6



typ 7



typ 8

Materiał: stal C 43

3/4" x 7/16"

podziałka  
19,05 mm


B1	B2	B3	b1	C	r3
11,1	30,3	49,8	10,8	2	19

Z	de	dp	1-rzędowe 12B-1					2-rzędowe 12B-2					3-rzędowe 12B-3							
			kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]
13	87,80	79,60	P1426	60	25	1210	1	0,35	-	-	-	-	-	-	-	-	-	-	-	-
14	93,80	85,61	P1427	67	25	1610	1	0,40	-	-	-	-	-	-	-	-	-	-	-	-
15	99,80	91,62	P1428	70	25	1610	1	0,44	P1447	71	38	1615	2	0,78	P1458	-	49,80	1615	5	1,11
16	105,80	97,65	P1429	71	25	1610	1	0,53	-	-	-	-	-	-	-	-	-	-	-	-
17	111,90	103,67	P1430	76	25	1610	1	0,66	P1448	80	38	1615	2	1,24	P1459	-	49,80	1615	5	1,75
18	117,90	109,71	P1431	90	32	2012	1	0,86	-	-	-	-	-	-	-	-	-	-	-	-
19	123,90	115,73	P1432	90	32	2012	1	0,94	P1449	90	32	2012	2	1,24	P1460	-	49,80	2012	5	2,02
20	130,00	121,78	P1433	90	32	2012	1	1,04	-	-	-	-	-	-	-	-	-	-	-	-
21	136,00	127,81	P1434	102	44	2517	1	1,24	P1450	108	44	2517	2	1,68	P1461	-	49,80	2517	5	2,09
22	142,00	133,86	P1435	108	44	2517	1	1,60	-	-	-	-	-	-	-	-	-	-	-	-
23	148,10	139,90	P1436	108	44	2517	1	1,70	P1451	108	44	2517	2	2,24	P1462	-	49,80	2517	5	3,00
24	154,10	145,94	P1437	108	44	2517	1	1,81	-	-	-	-	-	-	-	-	-	-	-	-
25	160,20	151,99	P1438	108	44	2517	1	1,93	P1452	108	44	2517	2	2,87	P1463	-	49,80	2517	5	3,98
26	166,20	158,04	P1439	108	44	2517	1	2,04	-	-	-	-	-	-	-	-	-	-	-	-
27	172,30	164,09	P1440	108	44	2517	1	2,14	P1453	108	44	2517	2	3,55	P1464	140	51,00	3020	4	3,90
28	178,30	170,13	P1441	108	44	2517	1	2,37	-	-	-	-	-	-	-	-	-	-	-	-
30	190,40	182,24	P1442	108	44	2517	1	2,60	P1454	108	44	2517	2	4,62	P1465	140	51,00	3020	4	5,64
38	238,90	230,69	P1443	108	44	2517	1	3,93	P1455	140	51	3020	2	8,11	P1466	140	51,00	3020	4	11,58
45	283,20	273,10	P1444	124	44	2517	1	5,52	-	-	-	-	-	-	-	-	-	-	-	-
*57	355,90	345,81	P1445	124	44	2517	6	6,48	P1456	160	51	3020	7	10,28	P1467	160	51,00	3020	8	13,23
*76	471,10	460,99	P1446	124	44	2517	6	9,71	P1457	160	51	3020	7	15,24	-	-	-	-	-	-

\* wykonane z żeliwa: G 22

# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO

DIN 8187 - ISO / R 606

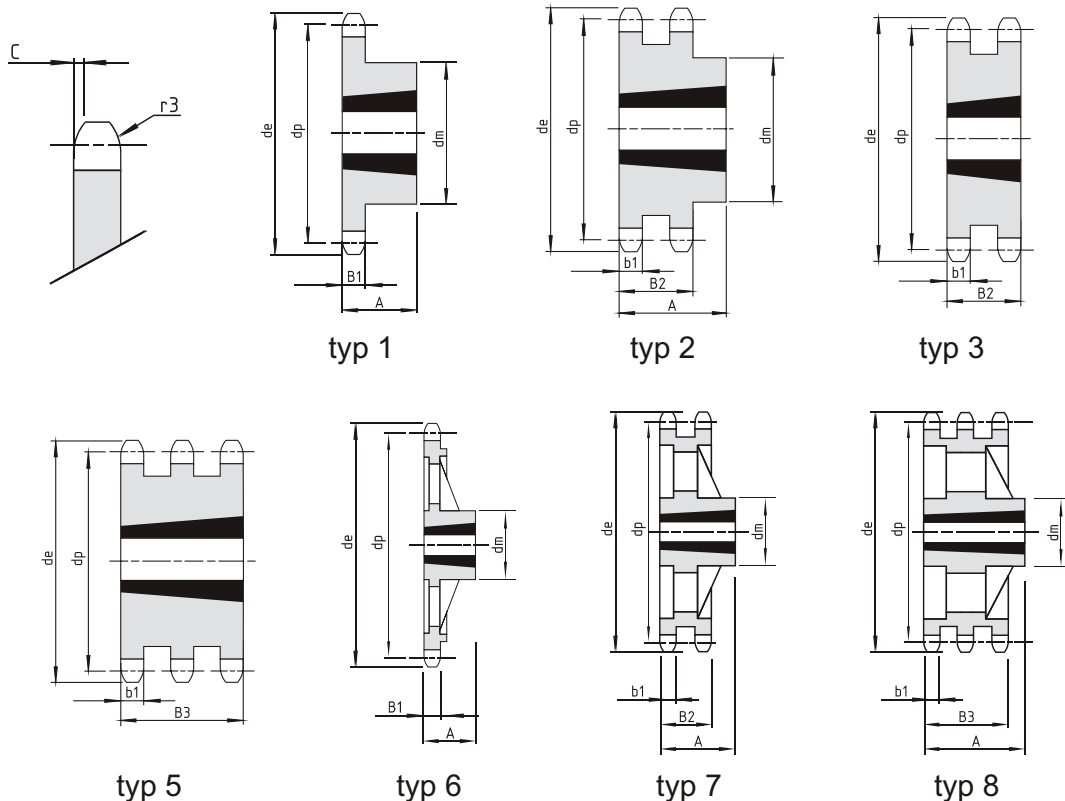

Materiał: stal C 43

1" x 17,02 mm

podziałka  
25,4 mm



B1	B2	B3	b1	C	r3
16,2	47,7	79,6	16,2	2,5	26

Z	$d_e$	$d_p$	1-rzędowe 16B-1					2-rzędowe 16B-2					3-rzędowe 16B-3							
			kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]	kod	dm	A	tuleja	typ	[kg]
13	117,70	106,13	P1468	73	38	1615	1	0,98	-	-	-	-	-	-	-	-	-	-	-	-
14	125,70	114,15	P1469	75	38	1615	1	1,14	-	-	-	-	-	-	-	-	-	-	-	-
15	133,70	122,16	P1470	76	38	1615	1	1,30	P1489	-	47,70	2012	3	2,11	-	-	-	-	-	-
16	141,80	130,20	P1471	90	32	2012	1	1,40	-	-	-	-	-	-	-	-	-	-	-	-
17	149,80	138,23	P1472	90	32	2012	1	1,59	P1490	-	47,70	2517	3	2,53	P1499	79,60	2517	5	4,29	-
18	157,80	146,28	P1473	108	44	2517	1	2,10	-	-	-	-	-	-	-	-	-	-	-	-
19	165,90	154,31	P1474	108	44	2517	1	2,29	P1491	-	47,70	2517	3	3,80	P1500	79,60	3030	5	4,36	-
20	173,90	162,38	P1475	110	44	2517	1	2,60	-	-	-	-	-	-	-	-	-	-	-	-
21	182,00	170,42	P1476	110	44	2517	1	2,81	P1492	140	51,00	3020	2	4,15	P1501	79,60	3030	5	6,69	-
22	190,10	178,48	P1477	110	44	2517	1	3,10	-	-	-	-	-	-	-	-	-	-	-	-
23	198,10	186,53	P1478	110	44	2517	1	3,38	P1493	140	51,00	3020	2	5,69	P1502	159	89,00	3535	4	7,80
24	206,20	194,59	P1479	110	44	2517	1	3,70	-	-	-	-	-	-	-	-	-	-	-	-
25	214,20	202,66	P1480	110	44	2517	1	3,97	P1494	140	51,00	3020	2	6,38	P1503	175	89,00	3535	4	10,93
26	222,30	210,72	P1481	110	44	2517	1	4,26	-	-	-	-	-	-	-	-	-	-	-	-
27	230,40	218,79	P1482	110	44	2517	1	4,55	P1495	140	51,00	3020	2	9,27	P1504	175	89,00	3535	4	14,06
28	238,40	226,85	P1483	110	44	2517	1	5,26	-	-	-	-	-	-	-	-	-	-	-	-
30	254,60	242,99	P1484	120	44	2517	1	5,97	P1496	140	76,00	3030	2	13,50	P1505	175	89,00	3535	4	19,10
38	319,20	307,59	P1485	160	51	3020	1	8,73	P1497	*160	76,00	3030	7	14,94	P1506	*178	89,00	3535	8	21,65
45	377,90	364,12	P1486	160	51	3020	1	12,49	-	-	-	-	-	-	-	-	-	-	-	-
*57	474,90	461,07	P1487	160	51	3020	6	13,87	P1498	178	89,00	3535	7	25,62	P1507	216	102,00	4040	8	40,50
*76	628,40	614,65	P1488	160	51	3020	6	22,63	-	-	-	-	-	-	-	-	-	-	-	-


\* wykonane z żeliwa: G 22

# KOŁA ŁAŃCUCHOWE POD TULEJE ZACISKKOWE TAPER LOCK DLA ŁAŃCUCHA ROLKOWEGO


DIN 8187 - ISO / R 606




typ 1




typ 2




typ 3




typ 4




typ 5



typ 6



typ 7



typ 8

Materiał: stal C 43

1"1/4 x 3/4"

podziałka  
31,75 mm

<b>B1</b>	<b>C</b>	<b>r3</b>
18,5	3,5	32

Z	de	dp	1-rzędowe 20B-1					
			kod	dm	A	tuleja	typ	[kg]
15	167,70	152,72	P1508	110	44	2517	1	3,39
17	187,70	172,78	P1509	110	44	2517	1	5,07
19	207,90	192,91	P1510	110	44	2517	1	6,75
21	228,00	213,04	P1511	120	44	2517	1	7,70
23	248,20	233,17	P1512	120	44	2517	1	8,78
25	268,40	253,33	P1513	120	44	2517	1	9,50
30	318,70	303,65	P1514	160	51	3020	1	11,90
*38	399,40	384,49	P1515	160	51	3020	6	15,80

\* wykonane z żeliwa: G 22