


ŁAŃCUCHY ROLKOWE NIKLOWANE WG EUROPEJSKIEJ NORMY

DIN 8187 - ISO / R 606

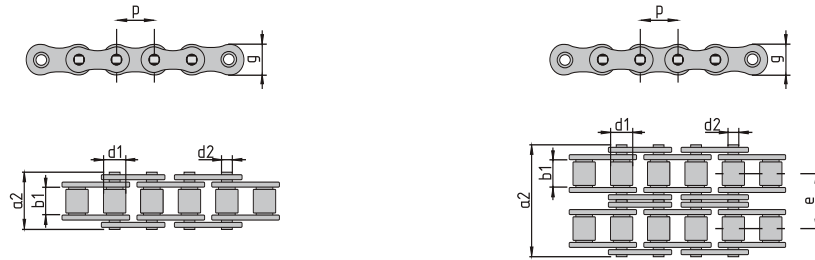

JEDNORZĘDOWE

| kod | ISO | podziałka P | | b1 mm min | d2 mm | d1 mm max | a2 mm max | g mm max | F _B min N | q [kg/m] ≈ |
|-------|-------|----------------|------|-----------------|----------|-----------------|-----------------|----------------|----------------------------|------------------|
| | | mm | cale | | | | | | | |
| D0081 | 06B-1 | 9,525 | 3/8" | 5,72 | 3,28 | 6,35 | 13,50 | 8,26 | 9.100 | 0,41 |
| D0082 | 08B-1 | 12,70 | 1/2" | 7,75 | 4,45 | 8,51 | 17,00 | 11,81 | 18.200 | 0,70 |
| D0083 | 10B-1 | 15,875 | 5/8" | 9,65 | 5,08 | 10,16 | 19,60 | 14,73 | 22.700 | 0,95 |
| D0084 | 12B-1 | 19,05 | 3/4" | 11,68 | 5,72 | 12,07 | 22,70 | 16,13 | 29.500 | 1,25 |
| D0085 | 16B-1 | 25,40 | 1" | 17,02 | 8,28 | 15,88 | 36,10 | 21,08 | 58.000 | 2,70 |

DWURZĘDOWE

| kod | ISO | podziałka P | | b1 mm min | d2 mm | d1 mm max | a2 mm max | g mm max | e mm | F _B min N | q [kg/m] ≈ |
|-------|-------|----------------|------|-----------------|----------|-----------------|-----------------|----------------|---------|----------------------------|------------------|
| | | mm | cale | | | | | | | | |
| D0086 | 06B-2 | 9,525 | 3/8" | 5,72 | 3,28 | 6,35 | 23,80 | 8,26 | 10,24 | 17.300 | 0,78 |
| D0087 | 08B-2 | 12,70 | 1/2" | 7,75 | 4,45 | 8,51 | 31,00 | 11,81 | 13,92 | 31.800 | 1,35 |
| D0088 | 10B-2 | 15,875 | 5/8" | 9,65 | 5,08 | 10,16 | 36,20 | 14,73 | 16,59 | 45.400 | 1,85 |
| D0089 | 12B-2 | 19,05 | 3/4" | 11,68 | 5,72 | 12,07 | 42,20 | 16,13 | 19,46 | 59.000 | 2,50 |
| D0090 | 16B-2 | 25,40 | 1" | 17,02 | 8,28 | 15,88 | 68,00 | 21,08 | 31,88 | 110.000 | 5,40 |